


## Card Dispenser (Single Hopper)

### SCT3Q8-3A0241

For Variety of Cards Issued

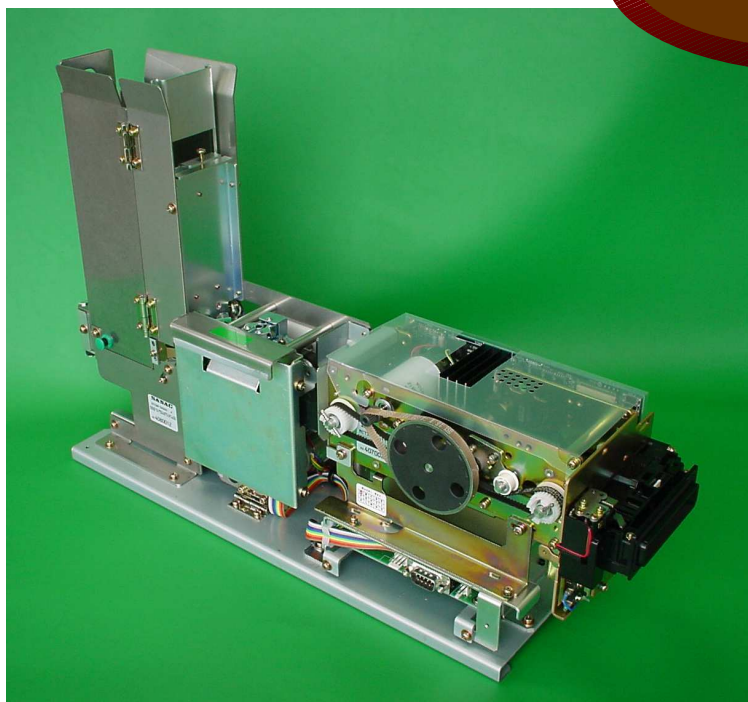

#### ■ APPLICATIONS

- 1) House Card issued
- 2) Members card issued
- 3) Card issued automatically
- 4) A variety of cards issued

#### ■ FEATURES

- 1) High reliability and durability
- 2) ISO standards compliant for chip card protocol handling
- 3) Option: Available for printing both

#### ■ SPECIFICATION

IC Contact	ISO/IEC 7816 Part 1,2 and 3 Protocol Handling (T=0 and 1) EMV2000 ver 4.0 compliant
Magnetic Stripe	ISO/IEC 7810,7811 series7813 JISX6301/6302 R/W (Hi-Co write not available)
Power Requirement	+24V DC / 2.0A (peak 4.0A)
Interface Signals	RS232C
Unit Life	More than 500,000 passes
Dimensions	115mm(W) × 471mm(D) × 297mm(H)
Card Capacity	Up to 150 pieces for Hopper Up to 20 pieces for Reject Bin
Connector	CD5509PA1F0 (CviLux) for RS232C 22-05-1042 (MOLEX) for Power
Mass	6.2kg approx

## SCT3Q8-3A0241

